



# Dumps



- 60" UTILITY DUMP (D5)
- 78" MEDIUM DUTY DUMP (D2)
- 83" TANDEM AXLE DUMP (D7)
- 83" XL DUMP (D9)
- 84" DECKOVER DUMP (DN)
- 96" DECKOVER DUMP (D8)
- 16' DECKOVER DUMP (DS)
- TANDEM DUAL DUMP (DD)





# 60" Utility Dump (D5)



**Lengths**  
8' & 10'

## Standard Features

- 5,200 lb. G.V.W.R.
- 5,200 lb. x 1 G.A.W.R.
- 2" Ball Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 1 - Posi-lube Brake Axle (5,200 lb.)
- 6 Leaf Double-eye Spring Suspension
- 2 - 15" White Spoke Wheels
- 2 - ST225/75B15 (2540 lb.)
- Electric Breakaway Kit w/ Charger
- 1/8" Treadplate Steel Fenders
- Toolbox
- Barn Door Gate w/ Camlatch
- 4 - D-Rings
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- 3" x 30" Hydraulic Cylinder
- 12' Control Cable
- 4" Channel Main Frame & Tongue
- 2" x 4" x 11ga. Tubing Bed Frame
- 3" Channel Crossmembers 16"oc
- 10ga. Steel Bed
- 5' Wide Bed
- 10ga. Steel Sides
- 18" High Sides
- DOT Approved Flushmount Lifetime • LED Lights
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## Coupler Options

- 2" A-Frame (7,000 lb.) \*
- BP 2 5/16" Adjustable (14,000 lb.)
- 3" Pintle Eye - Channel-mount (21,000 lb.)

## Axle Options

- (2) 3,500# Electric / Spring
- (1) 5,200# Electric / Spring \*
- (1) 5,200# Hydraulic Drum / Spring
- (2) 5,200# Electric / Spring
- (2) 5,200# Hydraulic Drum / Spring

## Tail Options

- Split Gate \*
- Split / Spreader Gate

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- Battery Charger 12V
- 12"oc Crossmembers
- 1 Extra Pair of D-Rings
- Mount Only for Spare Tire
- Ramps
- Spare Tire and Mount
- 18" Side Extensions

## Notes:

- 8' 2.22 cu yds
- 10' 2.77 cu yds



# 78" Medium Duty Dump (D2)



**Lengths**  
10' & 12'

## Standard Features

- 9,900 lb. G.V.W.R.
- 5,200 lb. x 2 G.A.W.R.
- 2 5/16" A Frame Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 2 - Posi-lube Brake Axle (5,200 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 15" White Spoke Wheels
- 4 - 225/75R15 Radial Tires (1 lb.)
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Treadplate Steel Fenders
- Toolbox
- Barn Door Gate
- 4 - D-Rings
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- 5" x 30" Hydraulic Cylinder
- 12' Control Cable
- 5" Channel Main Frame & Tongue
- 3" Channel Crossmembers
- 10ga. Steel Bed
- 78" Wide Bed
- 18" 12ga Steel Sides
- DOT Approved Flushmount Lights
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## Coupler Options

- BP 2 5/16" A-Frame Incl.\*
- D BP 2 5/16" Adjustable (14,000 lb.)

## Axle Options

- (2) 3,500# Electric / Spring
- (2) 5,200# Electric / Spring\*

## Tail Options

- Split Gate\*

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Ramps

## Notes:

- 10' 3.61 cu yds
- 12' 4.33 cu yds

\* denotes a standard feature



# 83" Tandem Axle Dump (D7)



**Lengths**  
10', 12', & 14'

## Standard Features

- 10,400 lb. G.V.W.R.
- 5,200 lb. x 2 G.A.W.R.
- 2 5/16" Ball Adjustable Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 2 - Posi-lube Brake Axle (5,200 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- 1/8" Treadplate Steel Fenders
- Toolbox
- 2 - Way Gate (Barn Doors & Spread Gate)
- 6' 6" Slide In Channel Ramps
- 4 - D-Rings (Welded inside the Box)
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- 5" x 30" Hydraulic Cylinder
- 14' Requires ScissorLift Option
- 12' Control Cable
- Mounting Brackets for Roll-up Tarp
- 6" Channel Main Frame & Tongue
- 2" x 6" x 11ga. Tubing Bed Frame
- 3" Channel Crossmembers 16" on Center
- 10ga. Steel Bed
- 83" Wide Bed
- 10ga. Steel Sides
- 24" High Sides
- DOT Approved Flushmount Lifetime LED Lights
- Sealed Wire Harness
- Stake Pockets
- Sand Blasted, Acid Washed, Powder Coated



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.



AIR RIDE SUSPENSION AVAILABLE

## Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) \*
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Round (25,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 5,200# Electric / Spring \*
- (2) 5,200# Hydraulic Drum / Spring
- (2) 5,200# Elec/Hyd Disk / Spring
- (2) 7,000# Electric / Spring
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Surge Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Elec/Spring

## Tail Options

- Split / Spreader Gate \*

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- 2nd Jack & Toolbox (GN Only)
- 10k Jack (Bumper Pull)
- 6" Taller GN Riser
- 9,990 G.V.W.R.
- Battery Charger 12V
- Tarp Mounting Bracket
- 12"oc Crossmembers
- 1 Extra Pair of D-Rings
- Mount Only for Spare Tire
- Tarp kit 18ft x 84 inches (Pull Bar)
- Scissor Lift
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- 2-speed Jacks (12,000 lb.)
- 24" Side Extensions (Solid)
- HD 24" 10 Gauge Side Extensions

## Notes:

- 10' 5.12 cu yds
- 12' 6.14 cu yds
- 14' 7.17 cu yds
- \* denotes a standard feature



Also Available with  
a Gooseneck Coupler



# 83" XL Dump (D9)



Lengths  
16'

## Standard Features

- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Ball Adjustable Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 2 - Posi-lube Brake Axle (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- 1/8" Treadplate Steel Fenders
- Toolbox (Houses Battery and Pump Assembly)
- 2 - Way Gate (Barn Doors & Spread Gate)
- 6' 6" Slide In Channel Ramps
- 4 - D-Rings (Welded inside the Box)
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- 6" x 17" Hydraulic Cylinder w/Scissor Lift
- 12' Control Cable
- Mounting Brackets for Roll-up Tarp
- 6" Channel Main Frame & Tongue
- 2" x 6" x 11ga. Tubing Bed Frame
- 3" Channel Crossmembers 16" on Center
- 10ga. Steel Bed
- 83" Wide Bed
- 10ga. Steel Sides
- 24" High Sides
- DOT Approved Flushmount Lifetime LED Lights
- Sealed Wire Harness
- Stake Pockets
- Sand Blasted, Acid Washed, Powder Coated



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.



AIR RIDE SUSPENSION AVAILABLE

## Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) \*
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Round (25,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 7,000# Electric / Spring \*
- (2) 7,000# Hydraulic Drum / Spring
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Surge Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring

## Tail Options

- Split / Spreader Gate \*

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- 2nd Jack & Toolbox (GN Only)
- 10k Jack (Bumper Pull)
- 6" Taller GN Riser
- 9,990 G.V.W.R.
- Battery Charger 12V
- Tarp Mounting Bracket
- 12" oc Crossmembers
- 1 Extra Pair of D-Rings
- Mount Only for Spare Tire
- Tarp kit 18ft x 84 inches (Pull Bar)
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- 2-speed Jacks (12,000 lb.)
- 24" Side Extensions (Solid)

## Notes:

16' 8.19 cu yds

\* denotes a standard feature



Also Available with a Gooseneck Coupler



# 84" Deckover Dump (DN)



**Lengths**  
10', 12', & 14'

## Standard Features

- 9,990 lb. G.A.W.R.
- 5,200 lb. x 2 G.A.W.R.
- 2 5/16" Ball Adjustable Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 2 - Posi-lube Brake Axle (5,200 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Toolbox
- 2 - Way Gate (Barn Doors & Spread Gate)
- 80" Slide In Channel Ramps
- 4 - D-Rings (Welded inside the Box)
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- Scissor Lift
- 12' Control Cable
- 6" Channel Tongue
- 6" Channel Main Frame & Tongue
- 2" x 5" x 1 Iga. Tubing Bed Frame
- 3" Channel Crossmembers 16" on Center
- 10ga. Steel Bed
- 84" Wide Bed
- 12ga. Steel Sides
- 18" High Sides
- DOT Approved Flushmount Lifetime LED Lights
- Sealed Wire Harness w/ 7-Way RV Plug
- Sand Blasted, Acid Washed, Powder Coated
- Interstate (TM) Deep Cycle Battery

## Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) \*
- Rigid mount 2-5/16 (25,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Channel-mount (20,000 lb.)
- GN 2 5/16" Round (25,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 5,200# Electric / Spring \*
- (2) 5,200# Hydraulic Drum (1000 PSI Pump) / Spring
- (2) 5,200# Elec/Hyd Disk (1,600 PSI Pump) / Spring
- (2) 7,000# Electric / Spring
- (2) 7,000# Hydraulic Drum (1000 PSI Pump) / Spring
- (2) 7,000# Elec/Hyd Disk (1,600 PSI Pump) / Spring
- (2) 7,000# Surge Disk / Spring

## Tail Options

- Split / Spreader Gate \*

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- 10k Jack (Bumper Pull)
- Solar Battery Charger
- 6" Taller GN Riser
- 9,990 G.V.W.R.
- Battery Charger 12V
- 12"oc Crossmembers
- 1 Extra Pair of D-Rings
- Deck on the Neck (GN Only)
- 2-speed Jacks (12,000 lb.)



AIR RIDE SUSPENSION AVAILABLE

## Notes:

- Scissor Included



# 96" Deckover Dump (D8)



**Lengths**  
14'

## Standard Features

- 14,000 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Adjustable Ball Coupler
- Safety Chains
- 1 - Drop Leg Jack (7,000 lb.)
- 2 - Posi-lube Brake Axle (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- 1/8" Treadplate Steel Fenders
- Toolbox
- 2 - Way Gate (Barn Doors & Spread Gate)
- 80" Slide In Channel Ramps
- 4 - D-Rings
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- Scissor Lift
- 12' Control Cable
- 6" Channel Tongue
- 8" I-Beam Main Frame
- 1 Iga. Fabricated Bed Frame
- 2" x 6" x 1 Iga. Tubing Outer Bed Frame
- 3" Channel Crossmembers 16" on Center
- 10ga. Steel Bed
- 96" Wide Bed
- 12ga. Steel Sides
- 19" High Fold Down Sides
- DOT Approved Flushmount Lifetime LED Lights
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated

## Coupler Options

- BP 2 5/16" Adjustable (14,000 lb.) \*
- Rigid mount 2-5/16 (25,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.)
- 3" Pintle Eye - Channel-mount (21,000 lb.)
- GN 2 5/16" Round (25,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric/Spring
- (2) 8,000# Load Range G Tires Elec/Hyd Disk/Spring

## Tail Options

- Split / Spreader Gate \*

## Other Options

- 2nd Jack
- 6" Taller GN Riser
- 9,990 G.V.W.R.
- 12"oc Crossmembers
- 1 Extra Pair of D-Rings
- Spare Tire and Mount (Bumper Pull)
- Deck on the Neck (GN Only)
- 2-speed Jacks (12,000 lb.)



AIR RIDE SUSPENSION AVAILABLE

## Notes:

- 14' 6.56 cu yds



# 16' Deckover Dump (DS)



**Lengths**  
16'

## Standard Features

- 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Posi-lube Brake Axle (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 - 16" White Spoke Wheels
- 4 - 235/80R16 Radial Tires (3,520 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Toolbox
- Barn Door Gate
- 6' 6" Ramps w/ Holders
- 40° Dump Pitch
- 12VDC Hydraulic Pump
- 6" x 17" Hydraulic Cylinder w/Scissor Lift
- 10" x 12 lb. I-Beam Main Frame, Riser & Neck
- 3" Channel Crossmembers 16" on Center
- 10ga. Steel Bed
- 91" Wide Bed
- 12ga. Steel Sides
- 36" High Removable Sides
- DOT Approved Flushmount Lifetime LED Lights
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) \*
- BP 2 5/16 Rigid Mount Coupler (20,000 lb.)
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Dexter Electric / Spring
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 8,000# Load Range G Tires Electric / Spring
- (2) 8,000# Load Range G Tires Elec/Hyd Disk / Spring

## Tail Options

- Barn Door Gate \*
- 2 - Way Gate (Barn Doors & Spread Gate)

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- 6" Taller GN Riser
- Battery Charger 12V
- 12"oc Crossmembers
- 1 Extra Pair of D-Rings
- Deck on the Neck (GN Only)
- 2-speed Jacks (12,000 lb.)
- Grain Chute

## Notes:

16' 13.48 cu yds

\* denotes a standard feature



AIR RIDE SUSPENSION AVAILABLE



# Tandem Dual Dump (DD)



**Lengths**  
16', 18', & 20'

## Standard Features

- 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- Safety Chains
- 2 - Drop Leg Jacks (10,000 lb.)
- 2 - Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- 8 - 16" Grey Dual Wheels w/ 8 on 6.5" Bolt Pattern
- 8 - 16" 235/80R16 Radial Tires (3,090 lb.)
- Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- Ladder on Right Side
- Toolbox
- 2 - Way Gate (Barn Doors & Spread Gate)
- 70" Ramps w/ Holders
- 4 Flushmount D-Rings
- 38° Dump Pitch
- 12VDC Hydraulic Pump
- 10 Ton Scissor Lift
- 12" x 19 lb. I-Beam Main Frame, Riser & Neck
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 3" Channel Crossmembers 16" OC
- 10ga. Steel Bed
- 96" Wide Bed
- 12ga. Steel Sides
- 36" High Removable Sides
- DOT Approved Flushmount Lifetime LED Lights
- Sealed Wire Harness
- Sand Blasted, Acid Washed, Powder Coated



At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.



AIR RIDE SUSPENSION AVAILABLE

## Coupler Options

- GN 2 5/16" Round (25,000 lb.) \*
- GN 2 5/16" Round (30,000 lb.)
- GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx
- 3" Pintle Eye - Face-mount (36,000 lb.)
- GN 2 5/16" Square (30,000 lb.)
- GN 2 5/16" Square (25,000 lb.)

## Axle Options

- (2) 10,000# Electric / Spring \*
- (2) 10,000# Electric / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (2) 12,000# Electric / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (2) 12,000# Load Range G 14 ply Tires Elec/Spring

## Tail Options

- Split / Spreader Gate \*
- Barn Doors

## Color Options

- Black Powdercoat \*
- Equipment Yellow Powdercoat
- Grey Powdercoat
- Red Powdercoat
- White Powdercoat

## Other Options

- Cold Weather Wiring Harness (7-Way RV)
- AL-KO Axles 10k
- Dexter Axles 10k
- 6" Taller GN Riser
- Under Frame Tie Down Flat
- Battery Charger 12V
- 4ft Removable Sides
- 12"oc Crossmembers
- 1 Extra Pair of D-Rings
- Weld-On Strap Ratchets (2)
- Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox
- 6ft Removable Sides
- 4" Ratchets every 4ft w/ Slide Track
- 6" Axle Spread (Longer Equalizer)
- Deck on the Neck 8x8 ft
- Side-mount Toolbox
- Winch 12VDC (12,000 lb.) Incl. Front Toolbox
- 2-speed Jacks (12,000 lb.)
- HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box
- Grain Chute (On DDs Only)


## Notes:

- 16' 14.22 cu yds
- 18' 16.00 cu yds
- 20' 17.78 cu yds

\* denotes a standard feature

# Dump Options Guide (some options not shown, please view the product page for a list of all options)

## Color Options

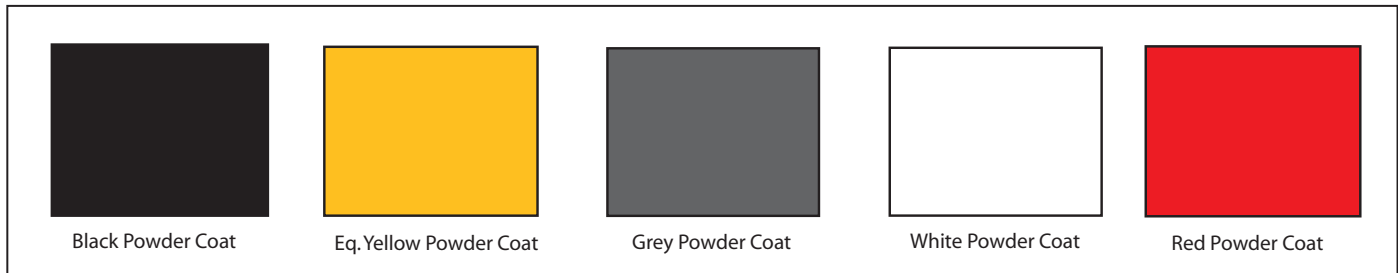

## Other Options



18" Side Extensions (D5)



24" Side Extensions (D7)



4 ft Removable Sides (DD)



Scissor Lift



Deck on the Neck



2nd Jack (D7, D8)



2-Speed Jacks



Hydraulic Jack (12,000 lb.)



Spare Tire Mount



**TRAILER FLEX** TrailerFlex Air Ride Suspension



Tandem Dual Dump Tarp



HD 24" 10 Gauge Side Extensions (D7)



## **PJ TRAILERS**

- #1 Professional Grade Open Trailer Manufacturer
- Broad Line of Dumps, Flatdecks, Utilities, Tilts & Equipment Trailers
- Over 300 Independent PJ Trailers Dealer Locations in the US & Canada

Visit Us Online at [www.pjtrailers.com](http://www.pjtrailers.com)

